

FANUC Robot *M-2iA*



FEATURES

FANUC Robot *M-2iA* is a medium-sized parallel link robot for high speed picking and assembly.

- Six models are available to meet a variety degree of freedom at wrist and operating space.
 - FANUC Robot *M-2iA/3A*, *M-2iA/3AL*
Using 3 axes at wrist, this model is suitable for complicated task, for example, arranging and assembling operations which need to change posture freely.
 - FANUC Robot *M-2iA/3S*, *M-2iA/3SL*
Using single axis rotation at wrist, this model is suitable for high speed picking of plenty work pieces on the conveyor while aligning direction of each work piece.
 - FANUC Robot *M-2iA/6H*, *M-2iA/6HL*
It is a total 3 axes robot without rotation axis at wrist with 6kg payload. This model is suitable for high speed picking of work pieces.
 - Among above six models, *M-2iA/3AL*, *M-2iA/3SL* and *M-2iA/6HL* cover wider operating area with its longer arm.
- Withstand a high pressure stream cleaning with IP69K of enclosed mechanical unit.
- Food option is available with appropriate materials and surface treatment for food sanitation as well as food grade grease. It contributes to the automation in the food market.
- Various intelligent functions are available, such as *iRVision* (integrated vision) and *iRPickTool*.

Application Examples




Fast arranging of food by *M-2iA/3S*




Fast packaging of gift box by *M-2iA/3A*

Operating space


M-2iA/3A, M-2iA/3AL

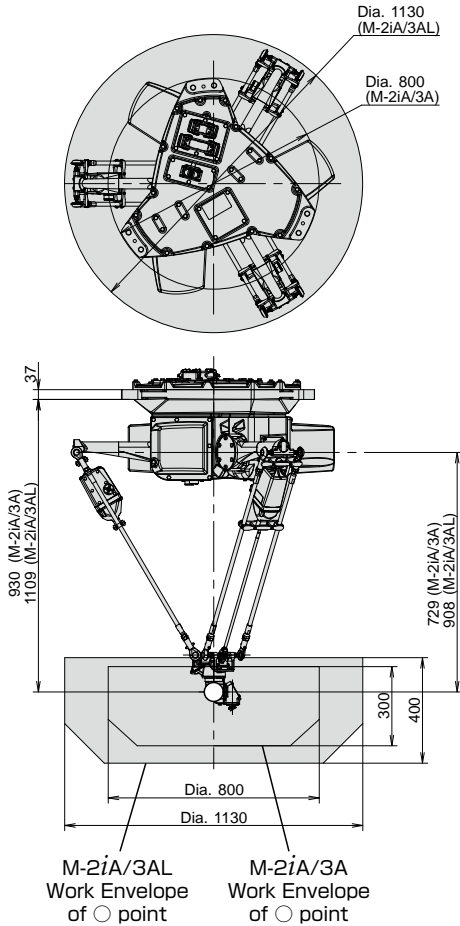

M-2iA/3S, M-2iA/3SL

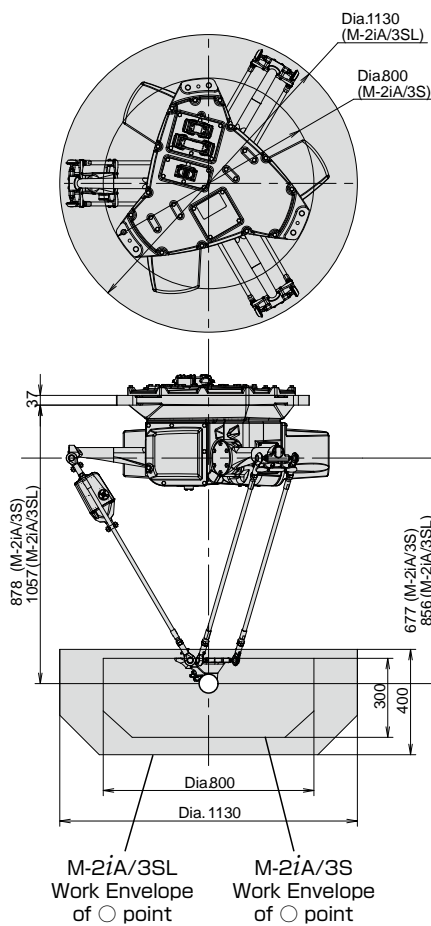

M-2iA/6H, M-2iA/6HL

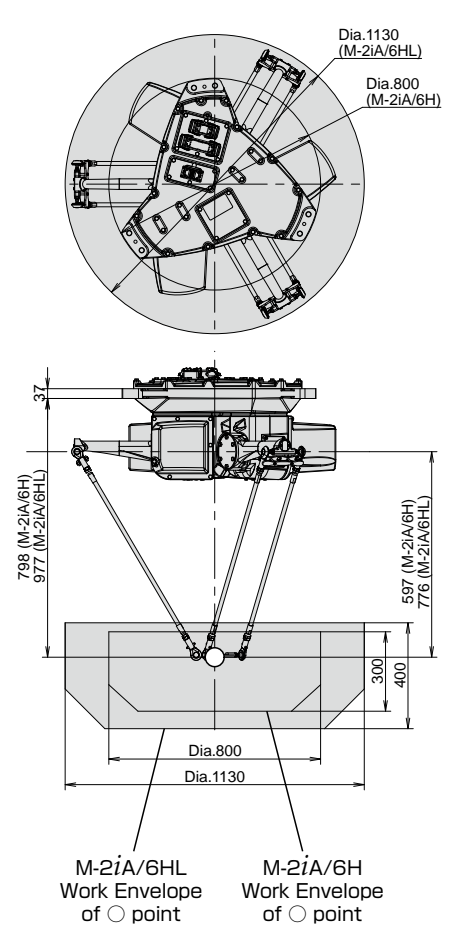

Specifications

Model		M-2iA/3A, M-2iA/3AL Note 4)	M-2iA/3S, M-2iA/3SL Note 4)	M-2iA/6H, M-2iA/6HL Note 4)
Type		Parallel link mechanism		
Controlled axes		6 axes (J1, J2, J3, J4, J5, J6)	4 axes (J1, J2, J3, J4)	3 axes (J1, J2, J3)
Installation		Ceiling mount		
Motion range (Maximum speed) Note 1)	J1-J3	Diameter 800 mm, height 300 mm (Note 4) Diameter 1130 mm, height 400 mm)		
	J4	720° (1700°/s) 12.57 rad (29.67rad/s)	720° (3500°/s) 12.57 rad (61.06rad/s)	-
	J5	300° (1700°/s) 5.24 rad (29.67rad/s)	-	-
	J6	720° (1700°/s) 12.57 rad (29.67rad/s)	-	-
Max. payload at wrist		3 kg	3 kg	6 kg
Repeatability Note 2)		± 0.03 mm		
Drive method		Electric servo drive by AC servo motor		
Mass Note 3)		140 kg	130 kg	125 kg
Installation environment		Ambient temperature : 0 to 45°C Ambient humidity Normally : 75%RH or less (No dew, nor frost allowed) Short term : Max. 95%RH or less (within one month) Vibration : 4.9 m/s ² (0.5G) or less		

Note 1) During short distance motions, the axis speed may not reach the maximum value stated.

Note 2) Compliant with ISO9283.

Note 3) Without controller.

Note 4) For long arm specification (M-2iA/3AL, M-2iA/3SL, M-2iA/6HL).

FANUC CORPORATION

Headquarters Oshino-mura, Yamanashi 401-0597, Japan
 Phone: 81-555-84-5555 Fax: 81-555-84-5512 <http://www.fanuc.co.jp>

- Overseas Affiliated Companies
- FANUC America Corporation
- FANUC Europe Corporation, S.A.
- SHANGHAI-FANUC Robotics CO., LTD.
- KOREA FANUC CORPORATION
- TAIWAN FANUC CORPORATION
- FANUC INDIA PRIVATE LIMITED
- FANUC SINGAPORE PTE. LTD.
- FANUC THAI LIMITED
- FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
- PT. FANUC INDONESIA
- FANUC OCEANIA PTY. LIMITED
- FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

- 3900 West Hamlin Road, Rochester Hills, MI 48309-3253, U.S.A.
- Zone Industrielle, L-6468 Echternach, Grand-Duché de Luxembourg
- No. 1500 Fulian Road, Baoshan Area, Shanghai, China
- 101, Wanam-ro(st), Seongsan-gu, Changwon-si, Gyeongsangnam-do, 642-290 Republic of Korea
- No.10, 16th Road, Taichung Industrial Park, Taichung, Taiwan
- 41-A, Electronics City, Bangalore, 560 100, India
- No.1 Teban Gardens Crescent, Singapore 608919, Singapore
- 1301 Pattanakarn Road, Kwaeng Suanluang, Khet Suanluang, Bangkok 10250 Thailand
- No.32, Jalan Pengacara U1/48, Temasya Industrial Park, Section U1, Glenmarie, 40150 Shah Alam, Selangor Darul Ehsan, Malaysia
- JL. Boulevard Bukit Gading Raya Blok R, Jakarta 14240 Indonesia
- 10 Healey Circuit, Huntingwood, NSW 2148, Australia
- 17 Loper Ave, Aeroport Industrial Ests. Spartan Ext.2 P.O.Box 219, Isando 1600, Republic of South Africa

- Phone: 1-248-377-7000 Fax: 1-855-774-7051
- Phone: 352-727777-1 Fax: 352-727777-403
- Phone: 86-21-5032-7700 Fax: 86-21-5032-7711
- Phone: 82-55-278-1200 Fax: 82-55-284-9826
- Phone: 886-4-2359-0522 Fax: 886-4-2359-0771
- Phone: 91-80-2852-0057 Fax: 91-80-2852-0051
- Phone: 65-6567-8566 Fax: 65-6566-5937
- Phone: 66-2-714-6111 Fax: 66-2-714-6120
- Phone: 60-3-7628-0110 Fax: 60-3-7628-0220
- Phone: 62-21-4584-7285 Fax: 62-21-4584-7288
- Phone: 61-2-8822-4600 Fax: 61-2-8822-4666
- Phone: 27-11-392-3610 Fax: 27-11-392-3615

- All specifications are subject to change without notice.
- No part of this catalog may be reproduced in any form.
- The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.