

FANUC Robot P-1000iA




FEATURES


FANUC Robot P-1000iA is a paint robot with 15kg payload capacity with a large motion range and 7 axes.

- With 7degrees of freedom, painting work can be done efficiently in a limited space. The paint booth can be drastically reduced with a flexible layout.
- P-1000iA has a hollow wrist structure which is easy with piping. Paint control and color valves can be installed inside the arm, realizing reduced purge time and paint waste.
- It also supports electrostatic painting of waterborne paint, 1K and 2K solvent paints.
- It can be controlled from one controller in combination with the hood opener robot, P-35iA, and the door opener robot, P-20iB.
- FANUC's Zero Down Time package, which monitors and protects mechanical parts and painting process equipment is available. (option)

Application Examples

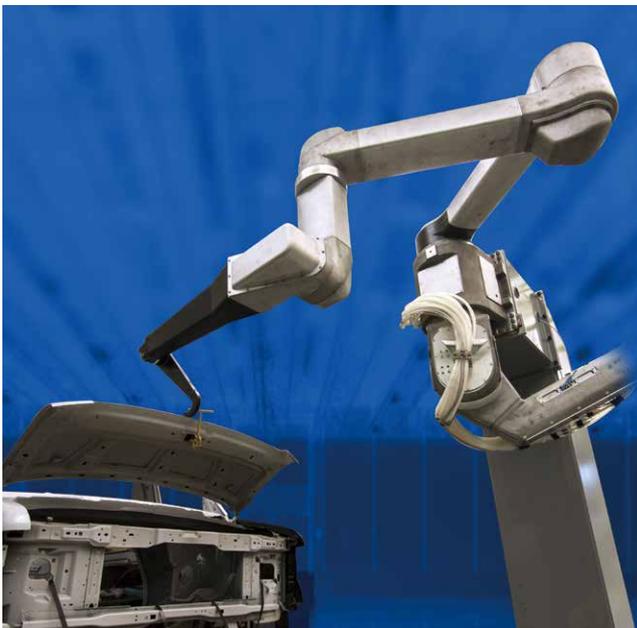

Hood opener P-35iA

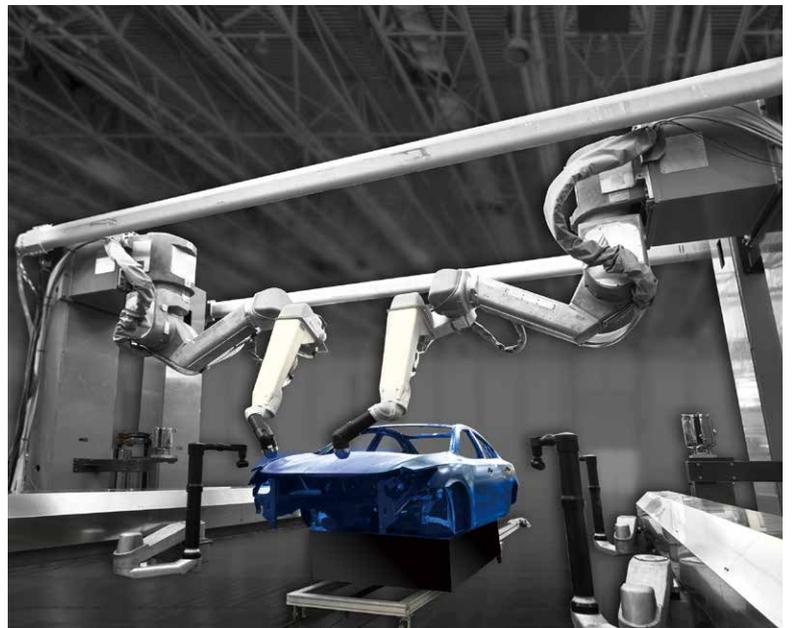

Body painting by P-1000iA and door opener P-20iB

P-1000iA




Specifications

Model		P-1000iA
Type		Articulated Type
Controlled axes		7 axes (J1,J2,J3,J4,J5,J6,J7)
Reach		2848 mm
Installation		Wall mount
Motion range (Maximum speed) (Note 1)	J1 axis rotation	220° (125°/s) 3.84 rad (2.18 rad/s)
	J2 axis rotation	150° (125°/s) 2.62 rad (2.18 rad/s)
	J3 axis rotation	240° (120°/s) 4.19 rad (2.09 rad/s)
	J4 axis rotation	160° (120°/s) 2.79 rad (2.09 rad/s)
	J5 axis rotation	1440° (200°/s) 25.13 rad (3.49 rad/s)
	J6 axis rotation	1440° (200°/s) 25.13 rad (3.49 rad/s)
	J7 axis rotation	1440° (200°/s) 25.13 rad (3.49 rad/s)
Max. load capacity at wrist		10 kg (1500 mm/s), 15 kg (1200 mm/s)
Max. load capacity on J2 arm		15 kg
Max. load capacity on J4 arm		25 kg
Allowable load moment at wrist	J5 axis	68 N·m 6.9 kgf·m
	J6 axis	57 N·m 5.8 kgf·m
	J7 axis	7.4 N·m 0.76 kgf·m
Allowable load inertia at wrist	J5 axis	3.2 kg·m ² 32.7 kgf·cm·s ²
	J6 axis	2.2 kg·m ² 22.4 kgf·cm·s ²
	J7 axis	0.07 kg·m ² 0.71 kgf·cm·s ²
Drive method		Electric servo drive by AC servo motor
Repeatability		± 0.5 mm
Mass (Note 2)		700 kg
Installation environment		Ambient temperature : 0 - 45°C Ambient humidity : Normally 75%RH or less (No dew nor frost allowed) Short term Max 95%RH or less (within one month) Vibration acceleration : 4.9 m/s ² (0.5G) or less

Note 1) During short distance motions, the axis speed may not reach the maximum value stated.

Note 2) Without controller.

Operating space

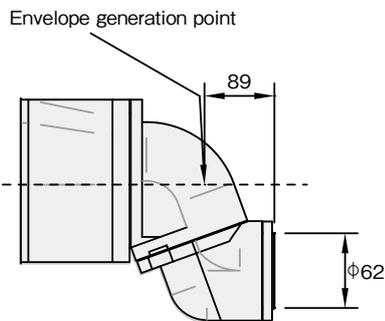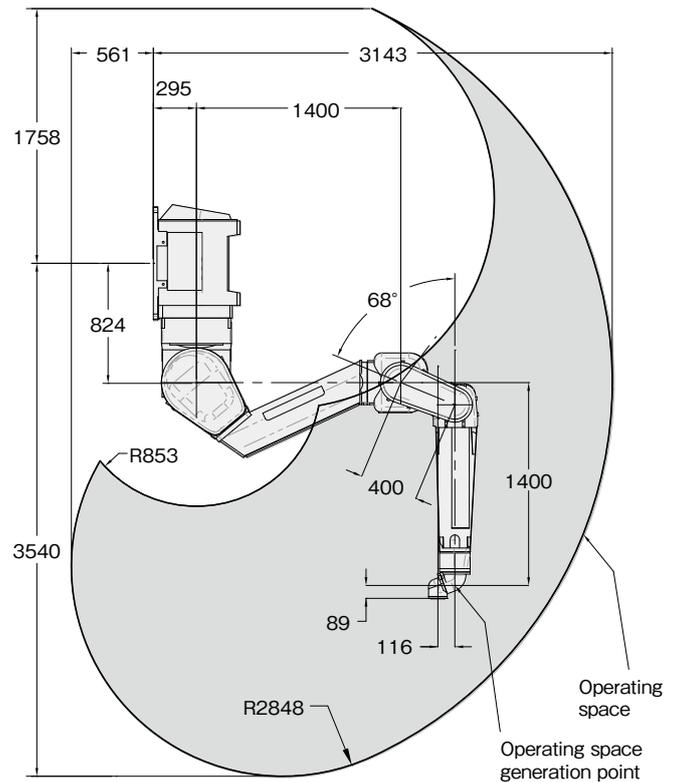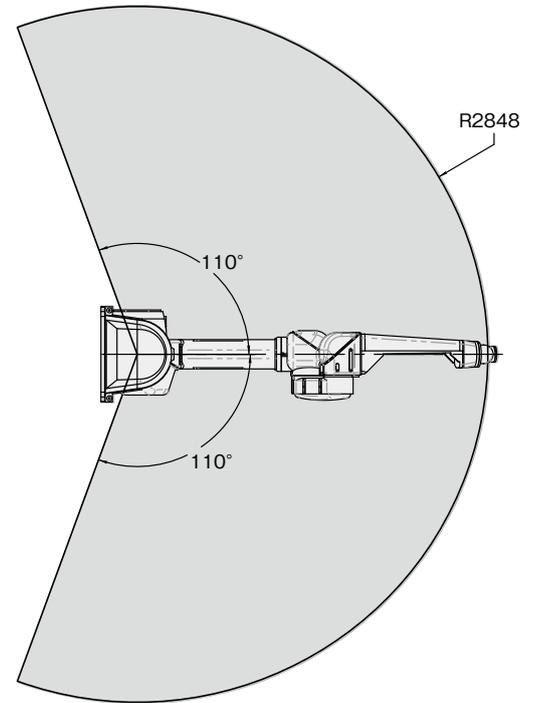

FANUC CORPORATION

Headquarters Oshino-mura, Yamanashi 401-0597, Japan
Phone: 81-555-84-5555 Fax: 81-555-84-5512 <http://www.fanuc.co.jp>

●Overseas Affiliated Companies
FANUC America Corporation
FANUC Europe Corporation, S.A.
SHANGHAI-FANUC Robotics CO., LTD.
KOREA FANUC CORPORATION
TAIWAN FANUC CORPORATION
FANUC INDIA PRIVATE LIMITED
FANUC SINGAPORE PTE. LTD.
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.

PT. FANUC INDONESIA
FANUC OCEANIA PTY. LIMITED
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

3900 West Hamlin Road, Rochester Hills, MI 48309-3253, U.S.A.
Zone Industrielle, L-6468 Echternach, Grand-Duché de Luxembourg
No. 1500 Fulian Road, Baoshan Area, Shanghai, China
101, Wanam-ro(st), Seongsan-gu, Changwon-si, Gyeongsangnam-do, 642-290 Republic of Korea
No.10, 16th Road, Taichung Industrial Park, Taichung, Taiwan
41-A, Electronics City, Bangalore, 560 100, India
No.1 Teban Gardens Crescent, Singapore 608919, Singapore
1301 Pattanakarn Road, Kwaeng Suanluang, Khet Suanluang, Bangkok 10250 Thailand
No.32, Jalan Pengacara U1/48, Temasya Industrial Park, Section U1, Glenmarie, 40150 Shah Alam, Selangor Darul Ehsan, Malaysia
J.L. Boulevard Bukit Gading Raya Blok R, Jakarta 14240 Indonesia
10 Healey Circuit, Huntingwood, NSW 2148, Australia
17 Loper Ave. Aeroport Industrial Ests. Spartan Ext.2 P.O.Box 219, Isando 1600, Republic of South Africa

Phone: 1-248-377-7000 Fax: 1-855-774-7051
Phone: 352-727777-1 Fax: 352-727777-403
Phone: 86-21-5032-7700 Fax: 86-21-5032-7711
Phone: 82-55-278-1200 Fax: 82-55-284-9826
Phone: 886-4-2359-0522 Fax: 886-4-2359-0771
Phone: 91-80-2852-0057 Fax: 91-80-2852-0051
Phone: 65-6567-8566 Fax: 65-6566-5937
Phone: 66-2-714-6111 Fax: 66-2-714-6120

Phone: 60-3-7628-0110 Fax: 60-3-7628-0220
Phone: 62-21-4584-7285 Fax: 62-21-4584-7288
Phone: 61-2-8822-4600 Fax: 61-2-8822-4666
Phone: 27-11-392-3610 Fax: 27-11-392-3615

●All specifications are subject to change without notice.
●No part of this catalog may be reproduced in any form.
●The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 2018
RP-1000iA(E)-01, 2018.4, Printed in Japan